

Product Description

Ecoclick Starters

Range of premium-quality glow switch starters for igniting fluorescent lamps with electromagnetic ballast.

Benefits

- The only starter that offers fast, easy installation with no need to use any extra tools
- No irritation – even firmly stuck starters can be removed easily
- Eco-friendly, recyclable concept (free of lead and radioactivity)
- More than 25% longer lamp life; lower maintenance costs compared with lower-quality, non-IEC-compliant starters
- Optimal connectivity through brass components and oxidation-resistant brass pins
- Flame-retardant components and UV-resistant canister for additional safety and secure ignition (validated by Underwriters Laboratories UL)

Features

- Redesigned canister top with two installation notches into which the pins of another starter fit perfectly (patented innovation)
- Radioactive-free (patented) and lead-free (RoHS-compliant)
- Premium reliability with more than 10,000 safe switches
- 2-pin igniter in plastic (flame-retardant polycarbonate) canister with high-quality radio-interference suppression capacitor
- Well-defined preheat and peak voltage ensure proper ignition

Application

- Ignition of fluorescent lamps of all brands with conventional electromagnetic ballasts using TL-D (T8), TL (T12), TL mini and PL-L lamps
- S2 starters are suitable for 110/130 V 4-22 W single applications, 220/240 V 4-6-8-15-18-22 W single applications and 220/240 V 4-22 W series applications. It is recommended for 220/240 V 18 W single applications for optimal performance
- S10 starters are suitable for 220/240 V 13 4-65 W single applications. It is required for 220/240 V 13 W single applications

System

- Starter replacement recommended when replacing fluorescent lamps

Related products




S2, 4-22W, WH



S10, 4-65W, WH

Dimensional drawing

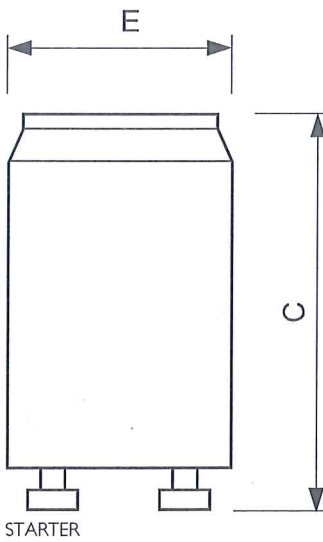

S10 4-65W SIN 220-240V WH EUR

Product	C	E
S10 4-65W SIN 220-240V WH EUR/20X25CT	40.3 mm	21.5 mm
S10 4-65W SIN 220-240V WH EUR/20X10CT	40.3 mm	21.5 mm
S10 4-65W SIN 220-240V WH EUR UNP/300	40.3 mm	21.5 mm
S10 4-65W SIN 220-240V WH Eur/32X25CT	40.3 mm	21.5 mm
S10 4-65W SIN 220-240V WH EUR/1000	40.3 mm	21.5 mm
S10 4-65W SIN 220-240V WH EUR/12X25CT	40.3 mm	21.5 mm
S10 4-65W SIN 220-240V WH EUR/12X25CT	40.3 mm	21.5 mm
S10 4-65W SIN 220-240V WH EUR/1000	40.3 mm	21.5 mm

General Information

order code	System Description
928390720202	Series
928390720229	Series
928390720230	Series
928390720238	Series
928390720247	Series
928390720250	Series
928392220202	Single
928392220223	Single
928392220225	Single
928392220229	Single
928392220230	Single
928392220238	Single
928392220247	Single
928392220250	Single

Operating and Electrical

order code	Voltage (Nom)	Non Reclosure Voltage (Min)	Power (Rated) (Nom)
928390720202	220-240	70	4-22
928390720229	220-240	70	4-22
928390720230	220-240	70	4-22
928390720238	220-240	70	4-22
928390720247	220-240	70	4-22
928390720250	220-240	70	4-22
928392220202	220-240	140	4-65
928392220223	220-240	140	4-65
928392220225	220-240	140	4-65
928392220229	220-240	140	4-65
928392220230	220-240	140	4-65
928392220238	220-240	140	4-65
928392220247	220-240	140	4-65
928392220250	220-240	140	4-65